


15.6" Flat surface multi touch Monitor

- 15.6" TFT LCD with resolution up to 1920 x 1080.
- Suitable for military, tablet, ruggedized PC, kiosk, advertising, POS, marine, transportation, gaming, gas pump.


Picture:

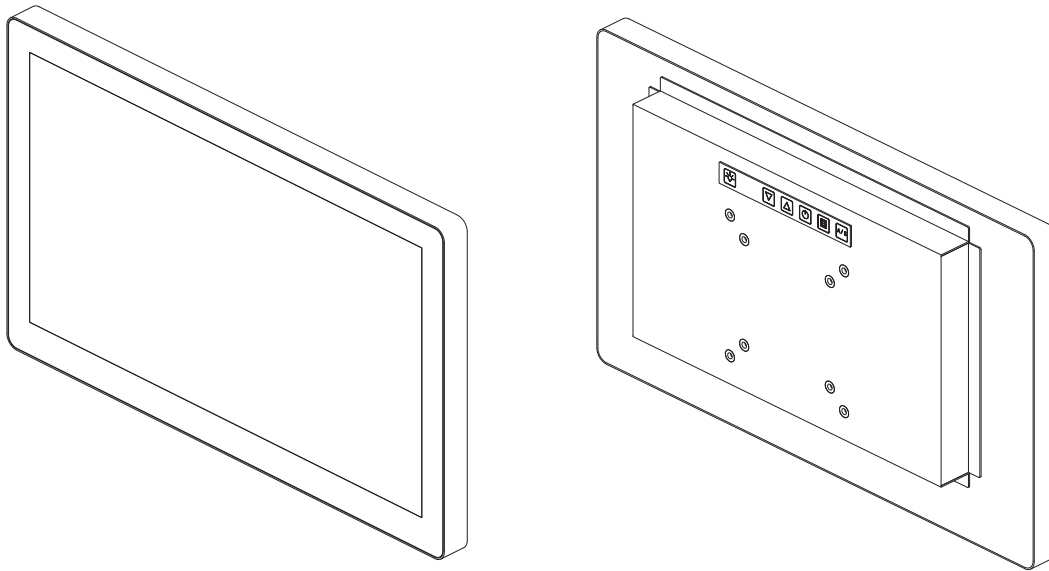


Specifications:

Panel Model	NF156LS-A
Screen Diagonal	15.6-inch
Active Display Area (mm)	344.16(H) × 193.59(V)
Pixel Pitch (mm)	0.17925(H) × 0.17925 (V)
Number of Pixels	1920(H) × 1080(V)
Contrast Ratio	1000:1
Display Color	262K Colors by using eDP
Brightness (cd/m ²)	300 cd/m ² (Without Touch Screen)
Viewing Angle(Typ.)	85 / 85 / 85 / 85 (R/L/U/D)
Signal Connector	15 PIN D-Sub,HDMI
Power Source	DC +12V(+/-10%)
Power Management	VESA DPMS Compliant
Operating Temperature	-0 ~ +50 °C
Storage Temperature	-20 ~ +60 °C
Plug & Play	VESA DDC 1/2B
Touch Type	Projected Capacitive Touch
Transparency	> 85% (typ.)
Hardness of surface	7H
Linearity	±1.5%(max.)
Touch Interface	USB

Mechanical Drawing:

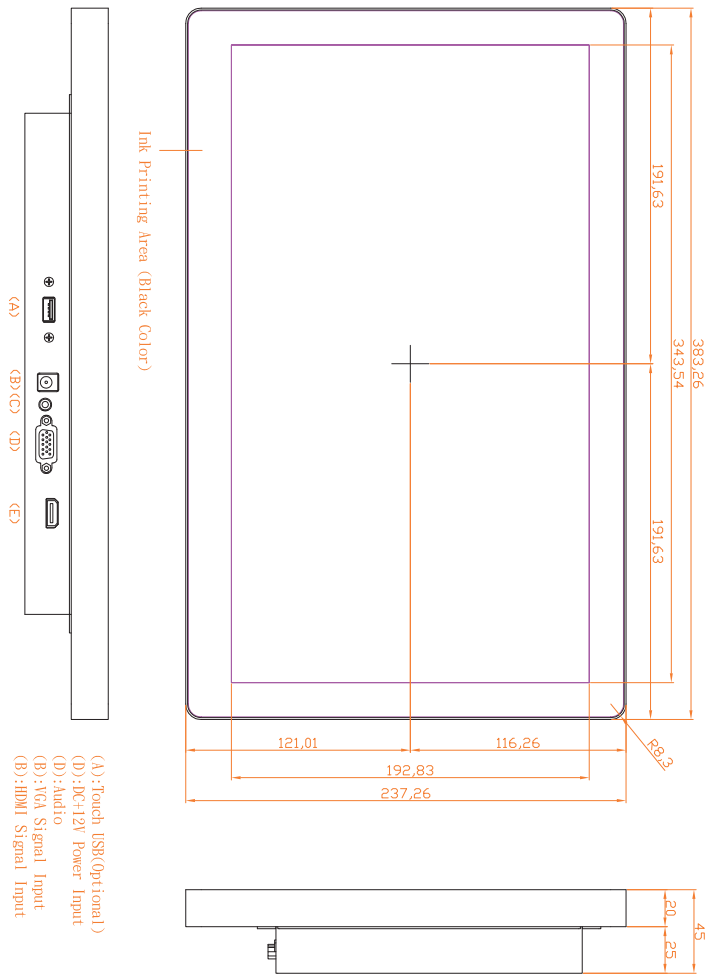

- (A): Touch (USB(Optional))
- (B): DC+12V Power Input
- (C): Audio
- (D): TGA Signal Input
- (E): HDMI Signal Input

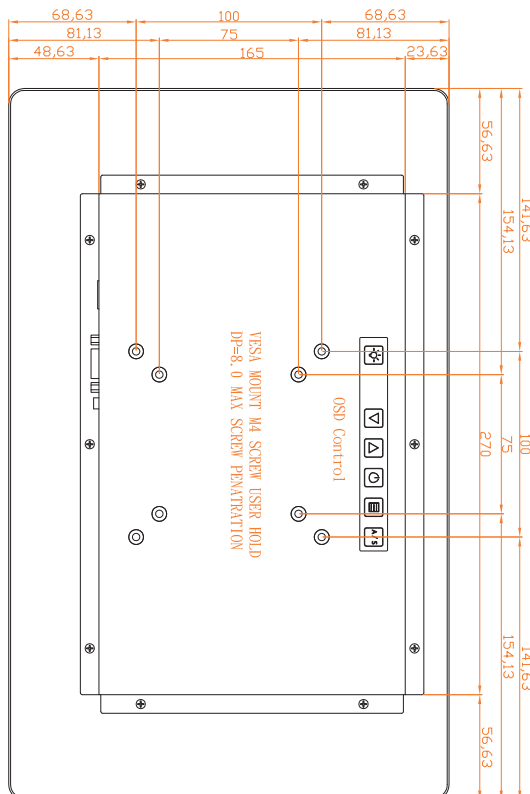

- Note :
- (1) Unit : mm °
 - (2) Unspecified tolerances are +/- 0.5mm.

*All specifications and photos are subject to change without notice.